© COPYRIGHT by MEIKO

© COPYRIGHT by MEIKO

1.1	Drain, on site odour trap, DN 70, Ø 75 a
2.1	Soft warm water 50°C, DN 20, G 3/4 a max. 0,54 mmol/l $CaCO_3$ (max. 3°dH) consumption approx. 141 l for tank filling
2.2	Soft cold water, max. 12 °C, DN 20, G 3/4 a max. 0,54 mmol/l $CaCO_3$ (max. 3°dH) consumption approx. 165 l/h for final rinse
3.1	Electricity supply to the machine: 3N PE 380V ~ 50Hz Connected load for peak: 57.3 A nominal current / - capacity: 57.3 A / 33.4 kW Max. Elect. cable cross-section: 35 mm² free cable end from finished floor level approx. 4 m Voltage equalising cable
6.0	Heat load of warewash area (Total heat emissions to the warewash area are made up of 6.1 and 6.4)
6.1	Heat emissions from the dishwashing machine (standard operation) in the area of the exhaust air surfaces 6.01 and 6.02: Latent: 2.4 kW, perceptible: 3.4 kW, total: 5.8 kW Distribution of heat emissions to the exhaust air surfaces 6.01 and 6.02: 6.01: approx. 67% 6.02: approx.33% (Data valid for a fresh water inlet temperature of 12–15 °C)
6.4	Heat emission from the washware must be considered separately.
	We recommend arranging the dimensions of the room ventilation system according to EN 16282. The data in 6.1 is based on an ambient temperature of 22 °C and relative humidity of approx. 55 %.
	Separation
Machine Equipment	
Main switch	
Exhaust air heat recovery	

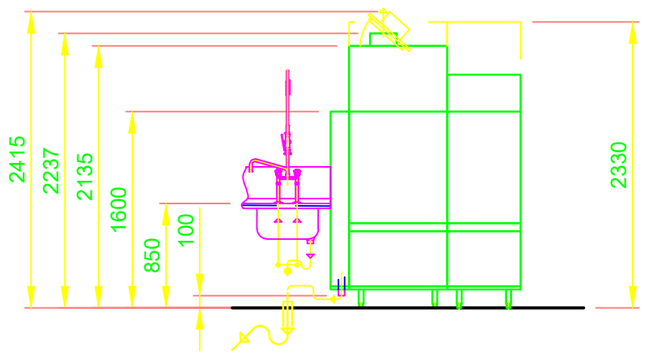

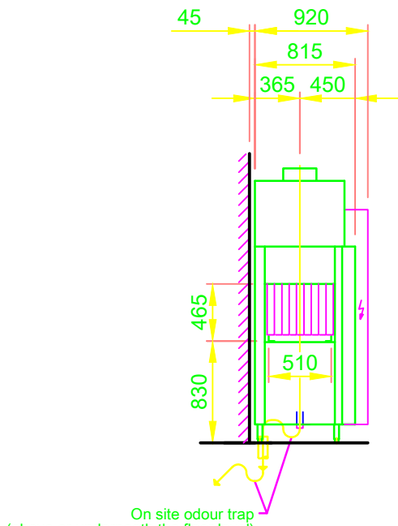

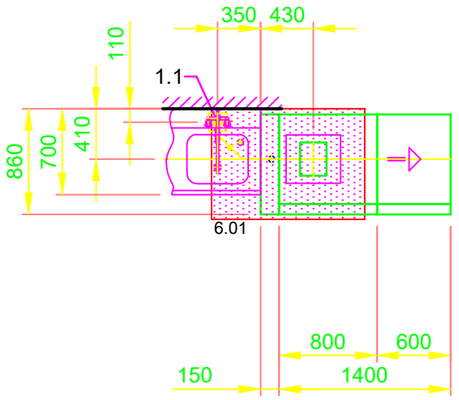



On-site drainage
provide in front of the machine!

MEIKO Clean Solutions Hong Kong Limited
Room 06, 12/F, Chevalier Commercial Centre, 8 Wang Hoi Road,
Kowloon Bay, Hong Kong S.A.R., China
Tel: (852) 3628 2722 info@meiko-hk.com
Website: http://www.meiko.de http://www.meiko-hk.com

This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change management.
Please note:
This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.

Revision			
Reference M-IQ STANDARD DRAWING / HKG			Type M-IQ K-S54 P6 L-R ELECTRO HR / TF: SWW
Drawing-No. S00102098			Order-No.
Scale 1:50	drawn: 10.02.2021 m-iplan		checked: 10.02.2021 m-iplan

© COPYRIGHT by MEIKO
© COPYRIGHT by MEIKO